



# XL ENERGY LIMITED

## DATA SHEET FOR XL6P54G200 MULTICRYSTALLINE PHOTOVOLTAIC MODULE

### ELECTRICAL CHARACTERISTICS


Maximum Power at STC (Pmax)	200 Wp (- 0%, +5%)
Open-Circuit Voltage(Voc)	33.02 V
Voltage at maximum power (Vmp)	26.30V
Short-Circuit Current (Isc)	8.21A
Current at maximum power (Imp)	7.61A
Max Module Efficiency	13.74%
Operating Temperature	- 40° C to +85° C
Maximum System Voltage	1000 V DC
Maximum Series Fuse Rating	15 A

STC: Irradiance 1000W/m<sup>2</sup>, Module temperature 25° C, AM 1.5

### MECHANICAL DIMENSIONS

Solar Cell	Poly-Crystalline 156 x 156 mm
Cells per Module	54 (6 x 9)
Dimensions	1527 mm x 1001 mm x 46 mm
Weight	19 Kg
Front Glass	3.2 mm Tempered
Frame	Anodized Aluminium Frame (Double Walled)
Junction Box	IP65, TÜV Rheinland certified
Output Cables	4.0 mm <sup>2</sup> asymmetrical lengths (-) 1250 mm and (+) 1000 mm

### PHYSICAL SPECIFICATIONS

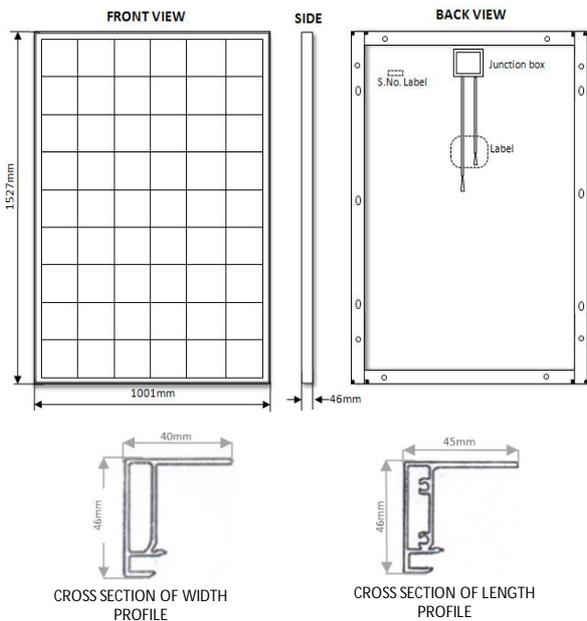

### TEMPERATURE COEFFICIENTS

Nominal Operating Cell Temperature (NOCT)	45 °C
Temperature Coefficient of Pmax	-0.47 %/° C
Temperature Coefficient of Voc	-0.36 %/° C
Temperature Coefficient of Isc	0.056 %/° C

### CERTIFICATIONS

IEC 61215, IEC 61730  
CE  
ISO 9001:2008


### WARRANTY

5 Years Warranty on Material and Workmanship  
25 Years Warranty on Power Output. 90% of the rated power is guaranteed for a period of 12 years and 80% of the rated power is guaranteed over a period of 25 years.


### SHIPPING DETAILS

Loading Capacity (20 ft container) : 252 panels in 12 cartons  
Loading Capacity (40 ft container) : 588 panels in 28 cartons

### CURRENT-VOLTAGE CHARACTERISTICS OF PHOTOVOLTAIC MODULE XL6P54G200 AT VARIOUS IRRADIANCE LEVELS

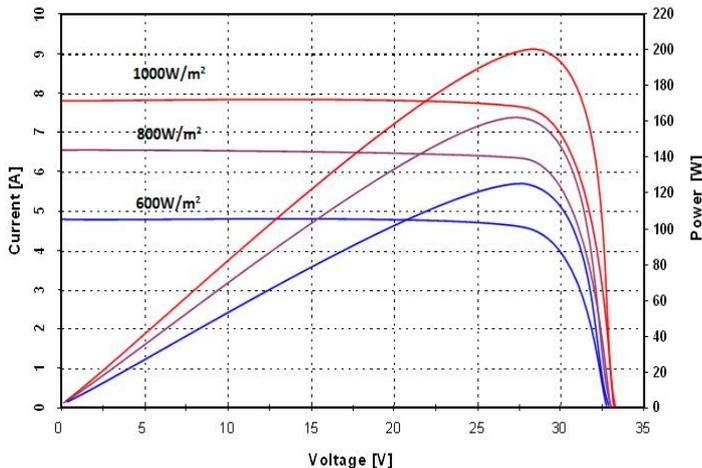

### TEMPERATURE DEPENDENCE OF Isc, Voc, Pmax

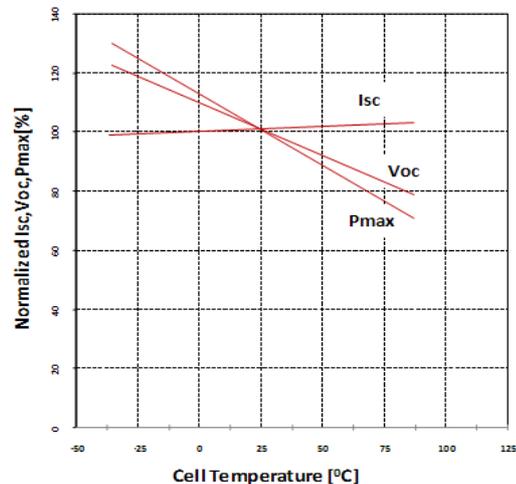

For more information - Website: [www.xlenergy.co](http://www.xlenergy.co) E-mail: [info@xlenergy.co](mailto:info@xlenergy.co)